

Product Codes


LED	T9EBE1700EZ	11W	ø465mm	1700lm
------------	-------------	-----	--------	--------

Emergency

EM	T9EBE1700EZ/EM	14W	ø465mm	1700lm
-----------	----------------	-----	--------	--------

DALI

	T9EBE1700XD	11W	ø465mm	1700lm
---	-------------	-----	--------	--------



Material and Finish

- Injection moulded polycarbonate diffuser
- U.V. stabilised to prevent discolouring
- Die cast aluminium housing
- Removable gear tray for easy maintenance
- Suitable for wall or ceiling mounting
- Removable gear tray for easy maintenance


LED Characteristics

CCT	4000°K
Ra (CRI)	>80
Life expectancy	50,000 hrs L80 B10
Board lumens	1700lm
Rated power	11W

Electrical Input

Rated input voltage	~230-240V AC
Rated input frequency	50-60Hz
Power factor	>0.9
Running current	0.05A
Total wattage	12.5W

Dimensions

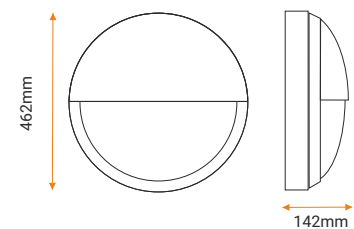

Weight



This product specification contains data based on typical performance at nominal power. Actual values stated may depend on the drive OR ballast and its application. Data is compiled by performing tests carried out in a controlled environment and is a representation of relative performance at the relevant nominal voltage. Actual performance figures can vary depending on operating conditions. NOTE: Data is subject to change without any prior notice.

Product Codes

LED	T9EBE3150EZ	22W	ø465mm	3150lm
------------	-------------	-----	--------	--------

Emergency

EM	T9EBE3150EZ/EM	25W	ø465mm	3150lm
-----------	----------------	-----	--------	--------

DALI

	T9EBE3150XD	22W	ø465mm	3150lm
---	-------------	-----	--------	--------



Material and Finish

- Injection moulded polycarbonate diffuser
- U.V. stabilised to prevent discolouring
- Die cast aluminium housing
- Removable gear tray for easy maintenance
- Suitable for wall or ceiling mounting
- Removable gear tray for easy maintenance


LED Characteristics

CCT	4000°K
Ra (CRI)	>80
Life expectancy	50,000 hrs L80 B10
Board lumens	3150lm
Rated power	22W

Electrical Input

Rated input voltage	~230-240V AC
Rated input frequency	50-60Hz
Power factor	>0.9
Running current	0.11A
Total wattage	25W

Dimensions

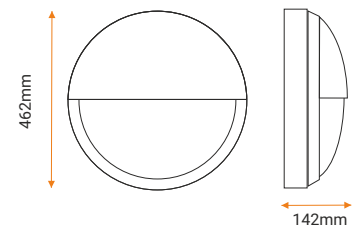

Weight



This product specification contains data based on typical performance at nominal power. Actual values stated may depend on the drive OR ballast and its application. Data is compiled by performing tests carried out in a controlled environment and is a representation of relative performance at the relevant nominal voltage. Actual performance figures can vary depending on operating conditions. NOTE: Data is subject to change without any prior notice.

Product Codes


LED	T9EBE3900EZ	30W	ø465mm	3900lm
------------	-------------	-----	--------	--------

Emergency

EM	T9EBE3900EZ/EM	33W	ø465mm	3900lm
-----------	----------------	-----	--------	--------

DALI

	T9EBE3900XD	30W	ø465mm	3900lm
---	-------------	-----	--------	--------



Material and Finish

- Injection moulded polycarbonate diffuser
- U.V. stabilised to prevent discolouring
- Die cast aluminium housing
- Removable gear tray for easy maintenance
- Suitable for wall or ceiling mounting
- Removable gear tray for easy maintenance


LED Characteristics

CCT	4000°K
Ra (CRI)	>80
Life expectancy	50,000 hrs L80 B10
Board lumens	3900lm
Rated power	30W

Electrical Input

Rated input voltage	~230-240V AC
Rated input frequency	50-60Hz
Power factor	>0.9
Running current	0.14A
Total wattage	32W

Dimensions

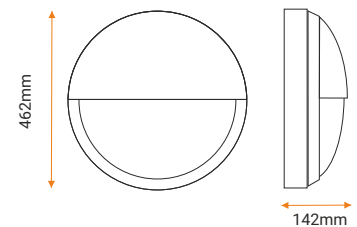

Weight



This product specification contains data based on typical performance at nominal power. Actual values stated may depend on the drive OR ballast and its application. Data is compiled by performing tests carried out in a controlled environment and is a representation of relative performance at the relevant nominal voltage. Actual performance figures can vary depending on operating conditions. NOTE: Data is subject to change without any prior notice.